

■ FEATURES

- Industrial standard SIP-4 package
- Operating temperature range -40°C ~ +105°C
- Low no load input current
- Continuous short circuit protection
- Isolation voltage 1500VDC
- Efficiency up to 90%
- 3 years warranty

■ APPLICATIONS

- Automation equipment
- Power supplies
- Industrial PC
- Data communications
- Distributed power system

■ DESCRIPTION

MU-2N series is an unregulated 2 Watt DC/DC converter in standard SIP-4 plastic package, with $\pm 10\%$ input voltage range. It features isolated voltage of 1500VDC, extremely low no load current, wide working temperature range from -40~ +105°C, and suits all kinds of systems like industrial control, automation field, and so on.

■ MODEL ENCODING

MU	S	-	05	05	-	2	N
Series Name	Output Quantity		Input Voltage	Output Voltage		Wattage	New Series
	S : Single		05 : 4.5~5.5V	03.3 : 3.3V			
			12 : 10.8~13.2V	05 : 5V			
			24 : 21.6~26.4V	09 : 9V			
				12 : 12V			
				15 : 15V			
				24 : 24V			

■ MODEL SELECTION TABLE(2W OUTPUT POWER)

MODEL NUMBER	INPUT				OUTPUT		EFF. (%)	CAPACITOR LOAD (Max.)
	VOLTAGE (VDC)		CURRENT (mA)		VOLTAGE (VDC)	CURRENT (mA)		
	NOMINAL	RANGE	NO LOAD	FULL LOAD				
MUS-0503.3-2N	5	4.5~5.5	20	494	3.3	600	81	470uF
MUS-0505-2N	5	4.5~5.5	20	470	5	400	85	470uF
MUS-0509-2N	5	4.5~5.5	20	460	9	222	87	220uF
MUS-0512-2N	5	4.5~5.5	20	445	12	167	90	220uF
MUS-0515-2N	5	4.5~5.5	20	445	15	133	90	220uF
MUS-0524-2N	5	4.5~5.5	25	455	24	84	88	100uF
MUS-1203.3-2N	12	10.8-13.2	8	206	3.3	600	81	470uF
MUS-1205-2N	12	10.8-13.2	8	194	5	400	86	470uF
MUS-1209-2N	12	10.8-13.2	8	189	9	222	88	220uF
MUS-1212-2N	12	10.8-13.2	8	185	12	167	90	220uF
MUS-1215-2N	12	10.8-13.2	8	187	15	133	89	220uF
MUS-1224-2N	12	10.8-13.2	15	189	24	84	88	100uF
MUS-2403.3-2N	24	21.6-26.4	6	103	3.3	600	81	470uF
MUS-2405-2N	24	21.6-26.4	6	97	5	400	86	470uF
MUS-2409-2N	24	21.6-26.4	6	96	9	222	87	220uF
MUS-2412-2N	24	21.6-26.4	6	96	12	167	87	220uF
MUS-2415-2N	24	21.6-26.4	6	95	15	133	88	220uF
MUS-2424-2N	24	21.6-26.4	8	95	24	84	88	100uF


Note: Efficiency and input current are measured at nominal input voltage and full load.

Other input to output voltages may be available. Please contact factory.

■ SPECIFICATION


INPUT	Voltage Range	5 : 4.5~5.5V ; 12 : 10.8~13.2V ; 24 : 21.6~26.4V		
	Surge Voltage(100ms max.)	5Vin models : 9Vdc ; 12Vin models : 18Vdc ; 24Vin models : 30Vdc		
	Filter	Internal capacitor		
	Protection	Fuse recommended (see page 6)		
OUTPUT	Voltage Accuracy	±3% max.		
	Rated Power	2W		
	Ripple & Noise ¹	100mVp-p max.		
	Line Regulation ²	±1.2% (other output) , (for 1% input variation) ±1.5% (3.3Vdc output) , (for 1% input variation)		
	Load Regulation ³	8% (other output) 12% (3.3Vdc output)		
	Switching Frequency	200KHz min.		
	Minimum Load	10% of full load		
PROTECTION	Short Circuit	Continuous , automatic recovery		
ENVIRONMENT	Cooling	Free-air convection		
	Working Temperature	-40~ +105°C (refer to “Derating Curve”)		
	Case Temperature	+115°C max.		
	Working Humidity	5% ~ 95% RH non-condensing		
	Storage Temp., Humidity	-55 ~ +125°C, 10 ~ 95% RH non-condensing		
	Temperature Coefficient	±0.05% / °C		
	Soldering Temperature	1.5mm from case of 3~5 sec./265°C(max.)		
	Vibration	10~500Hz, 2G 10min./1cycle, period for 60 min. each along X, Y, Z axes		
SAFETY & EMC	Isolation Voltage ⁴	I/P-O/P : 1500VDC		
	Isolation Resistance	I/P-O/P : 1000M Ohms / 500VDC / 25°C / 70% RH		
	Isolation Capacitance	50pF typ.		
	EMC Emission	Parameter	Standard	Test Level / Note
		Conducted	EN55032(CISPR32)	N/A
		Radiated	EN55032(CISPR32)	Class B
	EMC Immunity	Parameter	Standard	Test Level / Note
		ESD	BS IEC 61000-4-2	Air 8KV
		Radiated Susceptibility	BS IEC 61000-4-3	3V/m
		EFT/Burst	BS IEC 61000-4-4	0.5KV/5KHz
		Surge	BS IEC 61000-4-5	0.5KV/Line-Line
		Conducted	BS IEC 61000-4-6	3Vrms
		Magnetic field immunity	BS IEC 61000-4-8	1A/m
OTHERS		MTBF ⁵	>4,000,000Hours	
	Weight	1.3g typ.		
	Dimension(L*W*H)	11.7mm*7.5mm*10.2mm		
	Case Material	Non-conductive plastic		
NOTE	¹ Ripple & noise are measured at 20MHz with 1uF ceramic capacitor connect to the output pins.			
	² High line to low line at rated load.			
	³ Load regulation is for output load current change from 10% to 100%.			
	⁴ 1500VDC for 1 minute.			
	⁵ MIL-HDBK-217F @25 °C, Ground Benign.			
*All specifications are measured at Ta=25°C, humidity < 75%, nominal input voltage, and rated output load unless otherwise specified.				

MECHANICAL SPECIFICATION

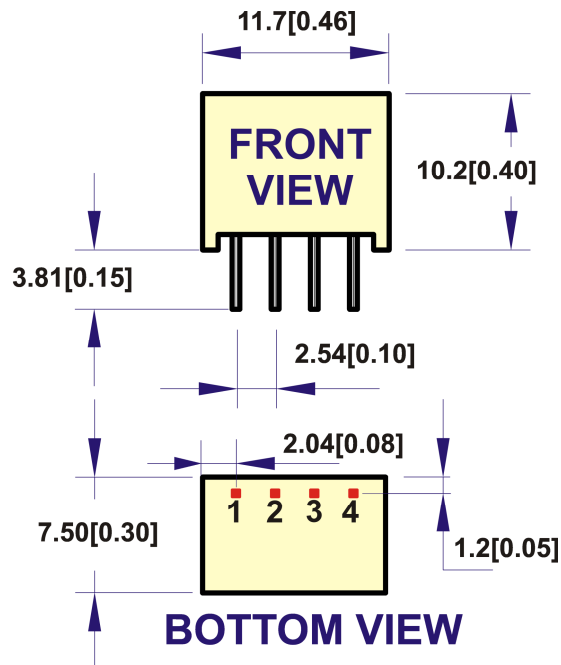


PIN CONNECTION	
PIN	SINGLE
1	-Vin
2	+Vin
3	-Vout
4	+Vout


All dimensions are in mm[Inches]
Pin size is 0.50x0.30mm[0.02"x0.01"]
Pin tolerance .XX= ± 0.05 mm
Tolerance .X = ± 0.5 mm
.XX= ± 0.25 mm

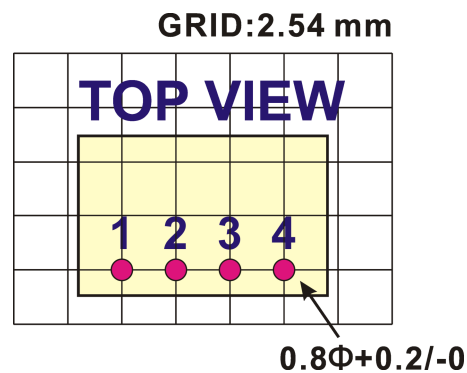


■ SIMPLIFIED SCHEMATIC

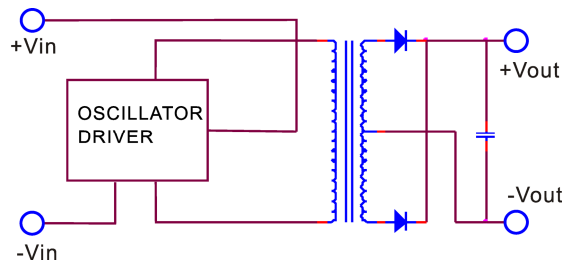

■ TYPICAL APPLICATIONS

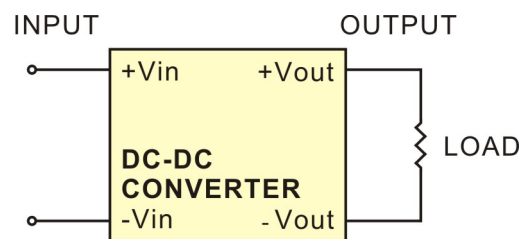


■ DERATING CURVE

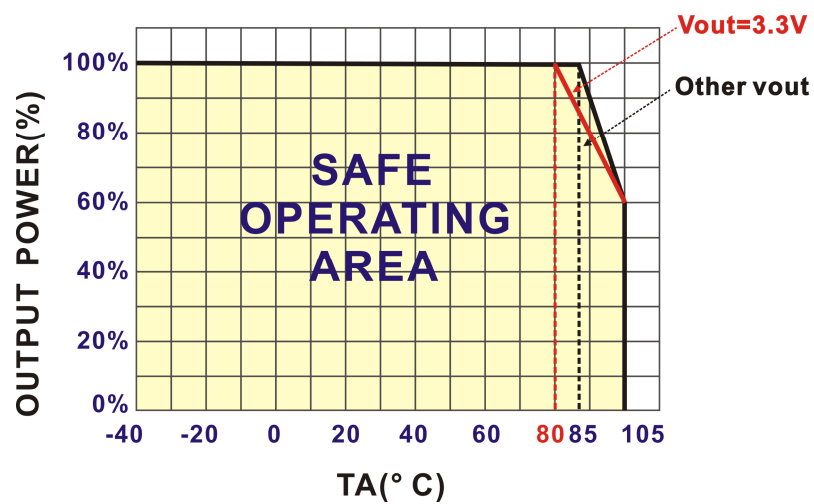




■ INPUT FUSE SELECTION GUIDE

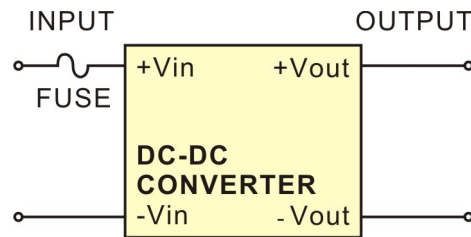

MODEL NUMBER	INPUT VOLTAGE(VDC)	FUSE
MUS-05XX-2N	4.5~5.5V	1000mA Slow-Blow Type
MUS-12XX-2N	10.8~13.2V	500mA Slow-Blow Type
MUS-24XX-2N	21.6~26.4V	300mA Slow-Blow Type

Note: Certain applications may require the installation of external fuse in front of the input.

■ PACKAGING INFORMATION

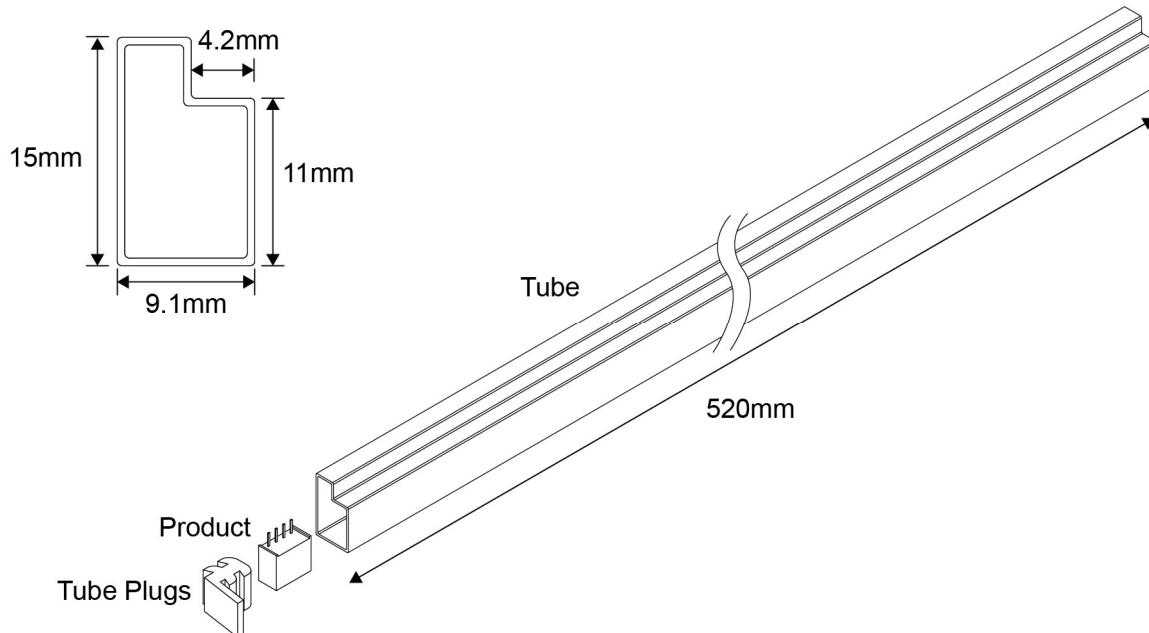

Packaging Quantity: 42 pcs converter per tube



DANUBE ENTERPRISE CO., LTD.

Tel: 886-7-3755165 **Fax:** 886-7-3755330

E-mail: danube@ms10.hinet.net